

Stainless Steel (YUS 550) Self Drilling Screws


YUS 550 Stainless Self Drilling performance superior to Bi-Metal 304, replacement for A2 304 Self-Drilling Bi-Metal Screws.

Features

- High-Strength heat-treated martensite stainless steel suitable for direct sheet metal application.
- High Hardness (Min. 600HV) and strength equivalent to G410 Stainless Steel.
- Superior corrosion resistance equivalent to A2 304 Stainless Steel.

Applications

- For medium duty purpose
- Stitch roof deck and wall panel side laps
- Residential steel frame construction
- Brick ties to steel framing

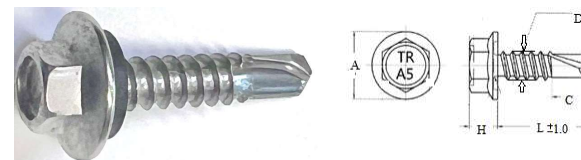

Finish	Material	Head
Passivated	Stainless Steel (YUS 550)	Hex Flange Washer With EPDM NEO

Product Code SKU	Gauge		Length L(mm)	Threads per inch (TPI)	Thread Length (mm)	Diameter (Max) D (mm)	Head Diameter A (mm)	Head Height H (mm)	Hex. Socket (inch)	Drilling Point Length (Min) C (mm)
	#	(mm)								
A5SDHN10-1616	10	4.8	16	16	Full	4.62-4.80	10.67-11.40	4.32-4.83	5/16"	4.0
A5SDHN10-1620	10	4.8	20	16	Full	4.62-4.80	10.67-11.40	4.32-4.83	5/16"	4.0
A5SDHN10-1625	10	4.8	25	16	Full	4.62-4.80	10.67-11.40	4.32-4.83	5/16"	4.0
A5SDHN12-1420	12	5.5	20	14	Full	5.28-5.46	13.97-14.70	5.08-5.90	5/16"	7.50
A5SDHN12-1425	12	5.5	25	14	Full	5.28-5.46	13.97-14.70	5.08-5.90	5/16"	7.50
A5SDHN12-1435	12	5.5	35	14	Full	5.28-5.46	13.97-14.70	5.08-5.90	5/16"	7.50
A5SDHN12-1445	12	5.5	45	14	Full	5.28-5.46	13.97-14.70	5.08-5.90	5/16"	7.50
A5SDHN14-1425	14	6.3	25	14	Full	6.20-6.24	13.97-15.40	5.84-6.60	3/8"	7.90
A5SDHN14-1435	14	6.3	35	14	Full	6.20-6.24	13.97-15.40	5.84-6.60	3/8"	7.90
A5SDHN14-1450	14	6.3	50	14	Full	6.20-6.24	13.97-15.40	5.84-6.60	3/8"	7.90
A5SDHN14-1475	14	6.3	75	14	Full	6.20-6.24	13.97-15.40	5.84-6.60	3/8"	7.90

1300 532 803
sales@tower-tr.com.au
www.tower-tr.com.au

Disclaimer: every effort has been made to ensure the information provided in this document is accurate and up to date. However, Tower Fastening System does not guarantee or warrant the accuracy, completeness, or currency of the information provided.

