




Open Grooved Blind Rivet

Grooved body rivets are produced by externally grooving the rivet eyelet. It is designed to set within a hole in fibrous material. When the rivet sets, the body shortens and the fibres of the material are grasped between the closed grooves.

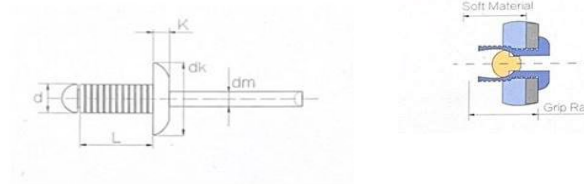

Advantage:	Applications
* Provide strong connection into dense materials like wood & plastic, * Great for blind non-through hole.	<ul style="list-style-type: none"> Wood & Leather

	Material	Finish	Head
Body:	Aluminium 5052	Polished	Dome (Truss)
Mandrel:	Steel	Zinc Plated	

Product Code SKU	Size		Body Length L (±1)mm	Head Height K (mm)	Head Dia. (Max) dK (mm)	Mandrel (Ref) P (mm)	Hole Size (mm)	Grip Range (mm)	Tensile N	Shear N
	d (mm)	Inch								
ASDG5-4	4.0	5/32"	12	1.7	8.4	27	4.2-4.4	3.5-8.0	1200	850
ASDG6-3	4.8	3/16"	10	2.0	10.1	27	5.1-5.3	1.5-6.0	1800	1500
ASDG6-5	4.8	3/16"	14	2.0	10.1	27	5.1-5.3	3.5-10.0	1800	1500
ASDG6-8	4.8	3/16"	18	2.0	10.1	27	5.1-5.3	8.0-14.0	1800	1500
ASDG6-12	4.8	3/16"	25	2.0	10.1	27	5.1-5.3	12.0-20.0	1800	1500

1300 532 803
 sales@tower-tr.com.au
 www.tower-tr.com.au

Disclaimer: every effort has been made to ensure the information provided in this document is accurate and up to date. However, Tower Fastening System does not guarantee or warrant the accuracy, completeness, or currency of the information provided.

