

Open Blind Rivet

Blind Rivets are now capable in every industrial field to replace Welding, Tapping Screws or Bolts & Nuts and to fasten materials speedy and securely from one side of the work by using an exclusive fastening tool.

Advantage:

- * Optimum clamp-up force
- * Accommodates oversized and irregular sized holes
- * High mandrel head retention
- * Vibration and moisture resistant
- * Reduced inventory, it can replace open type up to the size

|--|

Applications

Plastics


Automotive

Furniture industry

•

.

.






	Material	Finish	Head
Body:	Aluminium	Polished	Large Flange
Mandrel:	Steel	Zinc Plated	Multi-Grip

Product Code SKU	Size		Body Length	Head Height	Head Dia. (Max)	Mandrel (Ref)	Hole Size	Grip Range	Tensile	Shear
	D (mm)	Inch	L (±1)mm	E (mm)	H (mm)	P (mm)	(mm)	(mm)	Ν	Ν
ASLMG6-4	4.8	3/16"	12	2.5	16.5	27	4.9-5.0	2.0-8.0	2000	1320
ASLMG6-6	4.8	3/16"	16	2.5	16.5	27	4.9-5.0	6.0-11.5	2000	1320
ASLMG6-8	4.8	3/16"	18	2.5	16.5	27	4.9-5.0	8.0-13.5	2000	1320
ASLMG6-10	4.8	3/16"	20	2.5	16.5	27	4.9-5.0	10.0-15.5	2000	1320
ASLMG6-12	4.8	3/16"	25	2.5	16.5	27	4.9-5.0	12.0-19.0	2000	1320

1300 532 803 sales@tower-tr.com.au www.tower-tr.com.au

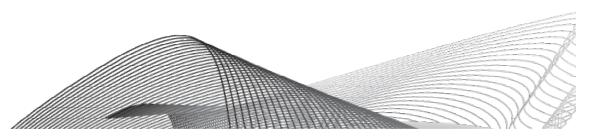

Product Data

Disclaimer: every effort has been made to ensure the information provided in this document is accurate and up to date. However, Tower Fastening System does not guarantee or warrant the accuracy, completeness, or currency of the information provided.