


Drywall Screws

Yellow Zinc

Drywall screws are traditionally used to attach drywall to metal and wood, but also have many other external applications.

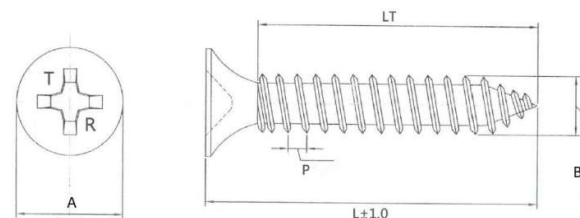

Features	Applications	Installation Speed	Drill Capacity
Bugle head Fine thread Needle point	For fixing to - light steel - timber - plasterboard	2300 -2500 RPM max drill speed	<1.0mm thin steel

Finish	Material	Head
Yellow Zinc Plated	Carbon Steel	Bugle Phillips Drive

Product Code SKU	Gauge		Length	Threads per inch (TPI)	Thread Length	Diameter	Head Diameter	Pitch	Phillips Drive
	#	(mm)	L (mm)		TL (mm)	B (mm)	A (mm)	P (mm)	#
DWBY06-1820	6	3.5	20	18	Full	3.4-3.6	8.0-8.5	1.41	2
DWBY06-1825	6	3.5	25	18	Full	3.4-3.6	8.0-8.5	1.41	2
DWBY06-1828	6	3.5	28	18	Full	3.4-3.6	8.0-8.5	1.41	2
DWBY06-1832	6	3.5	32	18	Full	3.4-3.6	8.0-8.5	1.41	2
DWBY06-1835	6	3.5	35	18	Full	3.4-3.6	8.0-8.5	1.41	2
DWBY06-1840	6	3.5	40	18	Full	3.4-3.6	8.0-8.5	1.41	2
DWBY06-1845	6	3.5	45	18	Full	3.4-3.6	8.0-8.5	1.41	2
DWBY06-1850	6	3.5	50	18	Full	3.4-3.6	8.0-8.5	1.41	2
DWBY07-1620	7	3.8	20	16	Full	3.78-3.96	8.0-8.5	1.58	2
DWBY07-1625	7	3.8	25	16	Full	3.78-3.96	8.0-8.5	1.58	2
DWBY07-1630	7	3.8	30	16	Full	3.78-3.96	8.0-8.5	1.58	2
DWBY07-1640	7	3.8	40	16	Full	3.78-3.96	8.0-8.5	1.58	2
DWBY07-1645	7	3.8	45	16	Full	3.78-3.96	8.0-8.5	1.58	2
DWBY07-1650	7	3.8	50	16	Full	3.78-3.96	8.0-8.5	1.58	2

1300 532 803
sales@tower-tr.com.au
www.tower-tr.com.au

Disclaimer: every effort has been made to ensure the information provided in this document is accurate and up to date. However, Tower Fastening System does not guarantee or warrant the accuracy, completeness, or currency of the information provided.

