


Chipboard Screws

Stainless Steel

Chipboard screws have coarse threads and fine shanks, designed for use in chipboards and soft woods.




| Features | Applications |
|---|--|
| Coarse threads and fine shanks, Csk.rib head available for working purpose | <ul style="list-style-type: none"> • Chipboard • Soft timbers • Decking |

| Finish | Material | Head |
|----------|-----------------------------|----------------------------------|
| Polished | Stainless Steel (A2 304) | Countersunk Rib. Square Drive |

| Product Code SKU | Gauge | | Length L(mm) | Threads per inch (TPI) | Thread Length TL(mm) | Diameter D(mm) | Head Diameter A(mm) | Square Drive (#) |
|---------------------|-------|------|-----------------|---------------------------|-------------------------|-------------------|------------------------|---------------------|
| | # | (mm) | | | | | | |
| KCBSQ0820 | 8 | 4.2 | 20 | 10 | 13 | 4.2-4.5 | 7.42-8.43 | 2 |
| KCBSQ0825 | 8 | 4.2 | 25 | 10 | 16 | 4.2-4.5 | 7.42-8.43 | 2 |
| KCBSQ0830 | 8 | 4.2 | 30 | 10 | 20 | 4.2-4.5 | 7.42-8.43 | 2 |
| KCBSQ0832 | 8 | 4.2 | 32 | 10 | 20 | 4.2-4.5 | 7.42-8.43 | 2 |
| KCBSQ0835 | 8 | 4.2 | 35 | 10 | 25 | 4.2-4.5 | 7.42-8.43 | 2 |
| KCBSQ0838 | 8 | 4.2 | 38 | 10 | 25 | 4.2-4.5 | 7.42-8.43 | 2 |
| KCBSQ0840 | 8 | 4.2 | 41 | 10 | 28 | 4.2-4.5 | 7.42-8.43 | 2 |
| KCBSQ0845 | 8 | 4.2 | 45 | 10 | 32 | 4.2-4.5 | 7.42-8.43 | 2 |
| KCBSQ0850 | 8 | 4.2 | 50 | 10 | 35 | 4.2-4.5 | 7.42-8.43 | 2 |
| | | | | | | | | |
| KCBSQ1065 | 10 | 4.8 | 65 | 8 | 35 | 4.7-5.0 | 8.64-9.77 | 2 |
| KCBSQ1075 | 10 | 4.8 | 75 | 8 | 50 | 4.7-5.0 | 8.64-9.77 | 2 |
| KCBSQ10100 | 10 | 4.8 | 100 | 8 | 50 | 4.7-5.0 | 8.64-9.77 | 2 |

1300 532 803
sales@tower-tr.com.au
www.tower-tr.com.au

Disclaimer: every effort has been made to ensure the information provided in this document is accurate and up to date. However, Tower Fastening System does not guarantee or warrant the accuracy, completeness, or currency of the information provided.

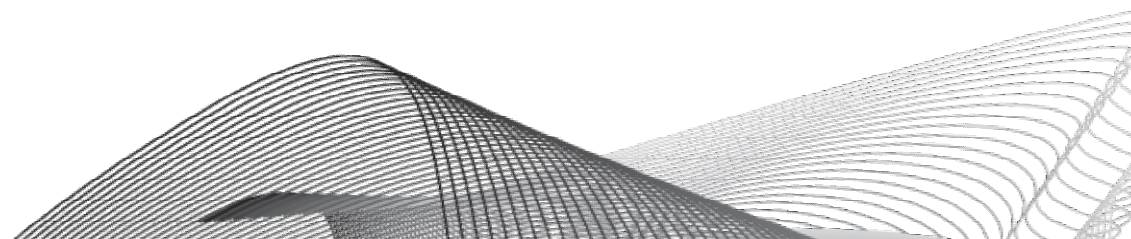


TOWER[®] FASTENING SYSTEM





1300 532 803
sales@tower-tr.com.au
www.tower-tr.com.au

Disclaimer: every effort has been made to ensure the information provided in this document is accurate and up to date. However, Tower Fastening System does not guarantee or warrant the accuracy, completeness, or currency of the information provided.

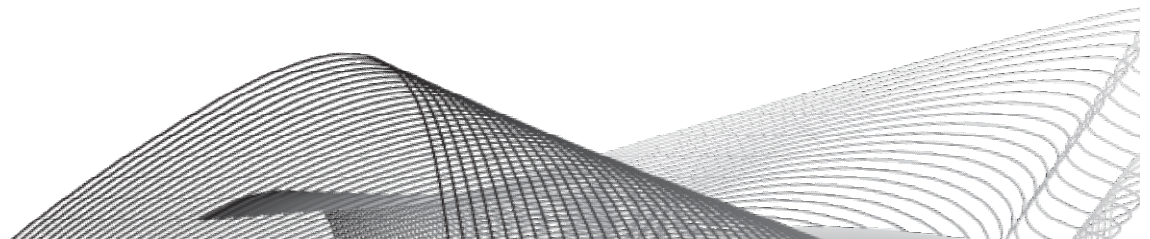

T17HC-AS3566 Class 4

Suitable for external use in heavy industrial or severe marine environments. Heavy industrial environments refer to atmosphere with medium pollution from industry. Severe marine environments refer to coastal areas with high airborne salinity. Severe marine environments refer to coastal areas with high airborne salinity. Corrosivity as classified in accordance with AS 3566-2002, 5.4 and ISO 9223.



| Features | Applications | Installation Speed | Drill Capacity |
|---|---|--------------------------|-------------------|
| Type 17 screws are a thread cutting screw for wood. Designed with a coarse tapping screw thread and a sharp point for capturing wood chips. | <ul style="list-style-type: none"> Fix timber to timber Decking Gates and fencing Landscaping | 1500 RPM max drill speed | <1.0mm thin steel |

| Finish | Material | Head |
|-----------------------------|--------------|-------------------|
| Ruspert [®] Plated | Carbon Steel | Hex Flange Washer |

| Product Code SKU | Gauge | | Length (mm) | Threads per inch (TPI) | Thread Length (mm) | Diameter (Max) (mm) | Head Diameter (Max) (mm) | Head Height (mm) | Hex. Socket (inch) | Cutting Length (mm) |
|---------------------|-------|------|----------------|------------------------------|--------------------------|------------------------|--------------------------------|---------------------|-----------------------|---------------------------|
| | # | (mm) | | | | | | | | |
| KCBSQ0820 | 8 | 4.2 | 20 | 10 | 13 | 4.2-4.5 | 7.42-8.43 | 2 | KCBSQ0820 | 8 |
| KCBSQ0825 | 8 | 4.2 | 25 | 10 | 16 | 4.2-4.5 | 7.42-8.43 | 2 | KCBSQ0825 | 8 |
| KCBSQ0830 | 8 | 4.2 | 30 | 10 | 20 | 4.2-4.5 | 7.42-8.43 | 2 | KCBSQ0830 | 8 |
| KCBSQ0832 | 8 | 4.2 | 32 | 10 | 20 | 4.2-4.5 | 7.42-8.43 | 2 | KCBSQ0832 | 8 |
| KCBSQ0835 | 8 | 4.2 | 35 | 10 | 25 | 4.2-4.5 | 7.42-8.43 | 2 | KCBSQ0835 | 8 |
| KCBSQ0840 | 8 | 4.2 | 41 | 10 | 28 | 4.2-4.5 | 7.42-8.43 | 2 | KCBSQ0840 | 8 |
| KCBSQ0845 | 8 | 4.2 | 45 | 10 | 32 | 4.2-4.5 | 7.42-8.43 | 2 | KCBSQ0845 | 8 |
| KCBSQ0850 | 8 | 4.2 | 50 | 10 | 35 | 4.2-4.5 | 7.42-8.43 | 2 | KCBSQ0850 | 8 |
| | | | | | | | | | | |
| KCBSQ1065 | 10 | 4.8 | 65 | 8 | 35 | 4.7-5.0 | 8.64-9.77 | 2 | KCBSQ1065 | 10 |
| KCBSQ1075 | 10 | 4.8 | 75 | 8 | 50 | 4.7-5.0 | 8.64-9.77 | 2 | KCBSQ1075 | 10 |
| KCBSQ10100 | 10 | 4.8 | 100 | 8 | 50 | 4.7-5.0 | 8.64-9.77 | 2 | KCBSQ10100 | 10 |
| KCBSQ0820 | 8 | 4.2 | 20 | 10 | 13 | 4.2-4.5 | 7.42-8.43 | 2 | KCBSQ0820 | 8 |
| KCBSQ0825 | 8 | 4.2 | 25 | 10 | 16 | 4.2-4.5 | 7.42-8.43 | 2 | KCBSQ0825 | 8 |

1300 532 803
sales@tower-tr.com.au
www.tower-tr.com.au

Disclaimer: every effort has been made to ensure the information provided in this document is accurate and up to date. However, Tower Fastening System does not guarantee or warrant the accuracy, completeness, or currency of the information provided.

