




Self-Tapping screws are designed to create a thread while turned, while also being suitable for wood, sheet metal and plastics.




| Features | Applications |
|--|--|
| Pan Head ANSI (Unified) Type AB point DIN / ISO 7049 C | Sheet MetalTimberSome Plastics |






| Finish | Material | Head |
|----------|-----------------------------|------------------------|
| Polished | Stainless Steel (A2 304) | Pan Phillips Recess |

| Product Code SKU | Ga | auge | Length | Threads per inch | Thread Length | Diameter | Head Diameter | Head Height | Phillips Drive |
|---------------------|----|------|--------|------------------|------------------|-------------|---------------|-------------|----------------|
| | # | (mm) | (inch) | (TPI) | (mm) | D(mm) | A(mm) | H(mm) | (#) |
| KSTP0406 | 4 | 2.9 | 1/4" | 24 | Full | 2.74 - 2.89 | 5.21 - 5.56 | 1.78 - 2.03 | 1 |
| KSTP0410 | 4 | 2.9 | 3/8" | 24 | Full | 2.74 - 2.89 | 5.21 - 5.56 | 1.78 - 2.03 | 1 |
| KSTP0412 | 4 | 2.9 | 1/2" | 24 | Full | 2.74 - 2.89 | 5.21 - 5.56 | 1.78 - 2.03 | 1 |
| KSTP0416 | 4 | 2.9 | 5/8" | 24 | Full | 2.74 - 2.89 | 5.21 - 5.56 | 1.78 - 2.03 | 1 |
| KSTP0420 | 4 | 2.9 | 3/4" | 24 | Full | 2.74 - 2.89 | 5.21 - 5.56 | 1.78 - 2.03 | 1 |
| KSTP0425 | 4 | 2.9 | 1" | 24 | Full | 2.74 - 2.89 | 5.21 - 5.56 | 1.78 - 2.03 | 1 |
| KSTP0430 | 4 | 2.9 | 1-1/4" | 24 | Full | 2.74 - 2.89 | 5.21 - 5.56 | 1.78 - 2.03 | 1 |
| KSTP0440 | 4 | 2.9 | 1-1/2" | 24 | Full | 2.74 - 2.89 | 5.21 - 5.56 | 1.78 - 2.03 | 1 |



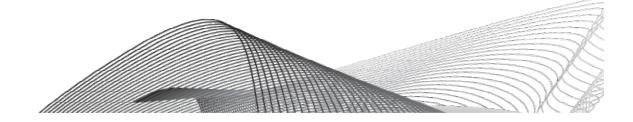






Self-Tapping screws are designed to create a thread while turned, while also being suitable for wood, sheet metal and plastics.



| Features | Applications |
|--|--|
| Pan Head ANSI (Unified) Type AB point DIN / ISO 7049 C | Sheet MetalTimberSome Plastics |






| Finish | Material | Head |
|----------|-----------------------------|------------------------|
| Polished | Stainless Steel (A2 304) | Pan Phillips Recess |

| Product Code SKU | Ga | auge | Length | Threads per inch | Thread Length | Diameter | Head Diameter | Head Height | Phillips Drive |
|---------------------|----|------|--------|------------------|------------------|-------------|---------------|-------------|----------------|
| | # | (mm) | (inch) | (TPI) | (mm) | D(mm) | A(mm) | H(mm) | (#) |
| KSTP0610 | 6 | 3.5 | 3/8" | 20 | Full | 3.35 - 3.53 | 6.50 - 6.85 | 2.21 - 2.46 | 2 |
| KSTP0612 | 6 | 3.5 | 1/2" | 20 | Full | 3.35 - 3.53 | 6.50 - 6.85 | 2.21 - 2.46 | 2 |
| KSTP0616 | 6 | 3.5 | 5/8" | 20 | Full | 3.35 - 3.53 | 6.50 - 6.85 | 2.21 - 2.46 | 2 |
| KSTP0620 | 6 | 3.5 | 3/4" | 20 | Full | 3.35 - 3.53 | 6.50 - 6.85 | 2.21 - 2.46 | 2 |
| KSTP0625 | 6 | 3.5 | 1" | 20 | Full | 3.35 - 3.53 | 6.50 - 6.85 | 2.21 - 2.46 | 2 |
| KSTP0630 | 6 | 3.5 | 1-1/4" | 20 | Full | 3.35 - 3.53 | 6.50 - 6.85 | 2.21 - 2.46 | 2 |
| KSTP0640 | 6 | 3.5 | 1-1/2" | 20 | Full | 3.35 - 3.53 | 6.50 - 6.85 | 2.21 - 2.46 | 2 |
| KSTP0650 | 6 | 3.5 | 2" | 20 | Full | 3.35 - 3.53 | 6.50 - 6.85 | 2.21 - 2.46 | 2 |
| KSTP0660 | 6 | 3.5 | 2-1/2" | 20 | Full | 3.35 - 3.53 | 6.50 - 6.85 | 2.21 - 2.46 | 2 |
| KSTP0675 | 6 | 3.5 | 3" | 20 | Full | 3.35 - 3.53 | 6.50 - 6.85 | 2.21 - 2.46 | 2 |

1300 532 803 sales@tower-tr.com.au www.tower-tr.com.au

Disclaimer: every effort has been made to ensure the information provided in this document is accurate and up to date. However, Tower Fastening System does not guarantee or warrant the accuracy, completeness, or currency of the information provided.

©TOWER Fastening System. All rights reserved. Version: 2309








Self-Tapping screws are designed to create a thread while turned, while also being suitable for wood, sheet metal and plastics.









| Features | Applications |
|--|--|
| Pan Head ANSI (Unified) Type AB point DIN / ISO 7049 C | Sheet MetalTimberSome Plastics |

| Finish | Material | Head |
|----------|-----------------------------|------------------------|
| Polished | Stainless Steel (A2 304) | Pan Phillips Recess |

| Product Code SKU | Ga | auge | Length | Threads per inch | Thread Length | Diameter | Head Diameter | Head Height | Phillips Drive |
|---------------------|----|------|--------|------------------|------------------|-------------|---------------|-------------|----------------|
| | # | (mm) | (inch) | (TPI) | (mm) | D(mm) | A(mm) | H(mm) | (#) |
| KSTP0810 | 8 | 4.2 | 3/8" | 18 | Full | 4.04 - 4.21 | 7.77 - 8.17 | 2.67 - 2.92 | 2 |
| KSTP0812 | 8 | 4.2 | 1/2" | 18 | Full | 4.04 - 4.21 | 7.77 - 8.17 | 2.67 - 2.92 | 2 |
| KSTP0816 | 8 | 4.2 | 5/8" | 18 | Full | 4.04 - 4.21 | 7.77 - 8.17 | 2.67 - 2.92 | 2 |
| KSTP0820 | 8 | 4.2 | 3/4" | 18 | Full | 4.04 - 4.21 | 7.77 - 8.17 | 2.67 - 2.92 | 2 |
| KSTP0825 | 8 | 4.2 | 1" | 18 | Full | 4.04 - 4.21 | 7.77 - 8.17 | 2.67 - 2.92 | 2 |
| KSTP0830 | 8 | 4.2 | 1-1/4" | 18 | Full | 4.04 - 4.21 | 7.77 - 8.17 | 2.67 - 2.92 | 2 |
| KSTP0840 | 8 | 4.2 | 1-1/2" | 18 | Full | 4.04 - 4.21 | 7.77 - 8.17 | 2.67 - 2.92 | 2 |
| KSTP0845 | 8 | 4.2 | 1-3/4" | 18 | Full | 4.04 - 4.21 | 7.77 - 8.17 | 2.67 - 2.92 | 2 |
| KSTP0850 | 8 | 4.2 | 2" | 18 | Full | 4.04 - 4.21 | 7.77 - 8.17 | 2.67 - 2.92 | 2 |
| KSTP0860 | 8 | 4.2 | 2-1/2" | 18 | Full | 4.04 - 4.21 | 7.77 - 8.17 | 2.67 - 2.92 | 2 |
| KSTP0875 | 8 | 4.2 | 3" | 18 | Full | 4.04 - 4.21 | 7.77 - 8.17 | 2.67 - 2.92 | 2 |



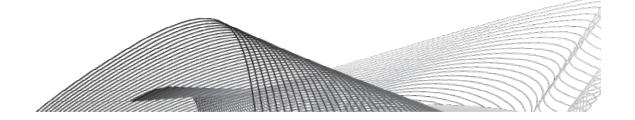






Self-Tapping screws are designed to create a thread while turned, while also being suitable for wood, sheet metal and plastics.









| Features | Applications |
|--|--|
| Pan Head ANSI (Unified) Type AB point DIN / ISO 7049 C | Sheet MetalTimberSome Plastics |

| Finish | Material | Head |
|----------|-----------------------------|------------------------|
| Polished | Stainless Steel (A2 304) | Pan Phillips Recess |

| Product Code SKU | Ga | nuge | Length | Threads per inch | Thread Length | Diameter | Head Diameter | Head Height | Phillips Drive |
|---------------------|----|------|--------|------------------|------------------|-------------|---------------|-------------|----------------|
| | # | (mm) | (inch) | (TPI) | (mm) | D(mm) | A(mm) | H(mm) | (#) |
| KSTP1010 | 10 | 4.8 | 3/8" | 16 | Full | 4.62 - 4.80 | 9.01 - 9.47 | 3.10 - 3.37 | 2 |
| KSTP1012 | 10 | 4.8 | 1/2" | 16 | Full | 4.62 - 4.80 | 9.01 - 9.47 | 3.10 - 3.37 | 2 |
| KSTP1016 | 10 | 4.8 | 5/8" | 16 | Full | 4.62 - 4.80 | 9.01 - 9.47 | 3.10 - 3.37 | 2 |
| KSTP1020 | 10 | 4.8 | 3/4" | 16 | Full | 4.62 - 4.80 | 9.01 - 9.47 | 3.10 - 3.37 | 2 |
| KSTP1025 | 10 | 4.8 | 1" | 16 | Full | 4.62 - 4.80 | 9.01 - 9.47 | 3.10 - 3.37 | 2 |
| KSTP1030 | 10 | 4.8 | 1-1/4" | 16 | Full | 4.62 - 4.80 | 9.01 - 9.47 | 3.10 - 3.37 | 2 |
| KSTP1040 | 10 | 4.8 | 1-1/2" | 16 | Full | 4.62 - 4.80 | 9.01 - 9.47 | 3.10 - 3.37 | 2 |
| KSTP1045 | 10 | 4.8 | 1-3/4" | 16 | Full | 4.62 - 4.80 | 9.01 - 9.47 | 3.10 - 3.37 | 2 |
| KSTP1050 | 10 | 4.8 | 2" | 16 | Full | 4.62 - 4.80 | 9.01 - 9.47 | 3.10 - 3.37 | 2 |
| KSTP1060 | 10 | 4.8 | 2-1/2" | 16 | Full | 4.62 - 4.80 | 9.01 - 9.47 | 3.10 - 3.37 | 2 |
| KSTP1075 | 10 | 4.8 | 3" | 16 | Full | 4.62 - 4.80 | 9.01 - 9.47 | 3.10 - 3.37 | 2 |










Self-Tapping screws are designed to create a thread while turned, while also being suitable for wood, sheet metal and plastics.







| Features | Applications |
|--|--|
| Pan Head ANSI (Unified) Type AB point DIN / ISO 7049 C | Sheet MetalTimberSome Plastics |

| Finish | Material | Head |
|----------|-----------------------------|-----------------------|
| Polished | Stainless Steel (A2 304) | Pan PhillipsRecess |

| Product Code Gauge SKU | | auge | Length | Threads per inch | Thread Length | Diameter | Head Diameter | Head Height | Phillips Drive |
|---------------------------|----|------|--------|------------------|------------------|-------------|---------------|-------------|----------------|
| | # | (mm) | (inch) | (TPI) | (mm) | D(mm) | A(mm) | H(mm) | (#) |
| KSTP1212 | 12 | 5.5 | 1/2" | 14 | Full | 5.31 - 5.46 | 1.34 - 10.79 | 3.53 - 3.83 | 3 |
| KSTP1216 | 12 | 5.5 | 5/8" | 14 | Full | 5.31 - 5.46 | 1.34 - 10.79 | 3.53 - 3.83 | 3 |
| KSTP1220 | 12 | 5.5 | 3/4" | 14 | Full | 5.31 - 5.46 | 1.34 - 10.79 | 3.53 - 3.83 | 3 |
| KSTP1225 | 12 | 5.5 | 1" | 14 | Full | 5.31 - 5.46 | 1.34 - 10.79 | 3.53 - 3.83 | 3 |
| KSTP1230 | 12 | 5.5 | 1-1/4" | 14 | Full | 5.31 - 5.46 | 1.34 - 10.79 | 3.53 - 3.83 | 3 |
| KSTP1240 | 12 | 5.5 | 1-1/2" | 14 | Full | 5.31 - 5.46 | 1.34 - 10.79 | 3.53 - 3.83 | 3 |
| KSTP1250 | 12 | 5.5 | 2" | 14 | Full | 5.31 - 5.46 | 1.34 - 10.79 | 3.53 - 3.83 | 3 |
| KSTP1260 | 12 | 5.5 | 2-1/2" | 14 | Full | 5.31 - 5.46 | 1.34 - 10.79 | 3.53 - 3.83 | 3 |
| KSTP1275 | 12 | 5.5 | 3" | 14 | Full | 5.31 - 5.46 | 1.34 - 10.79 | 3.53 - 3.83 | 3 |



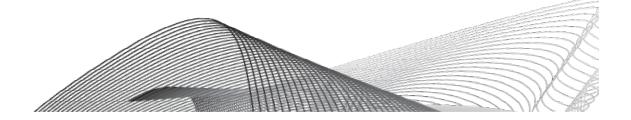






Self-Tapping screws are designed to create a thread while turned, while also being suitable for wood, sheet metal and plastics.







| Features | Applications |
|--|--|
| Pan Head ANSI (Unified) Type AB point DIN / ISO 7049 C | Sheet MetalTimberSome Plastics |

| Finish | Material | Head |
|----------|-----------------------------|------------------------|
| Polished | Stainless Steel (A2 304) | Pan Phillips Recess |

| Product Code SKU | Ga | nuge | Length | Threads per inch | Thread Length | Diameter | Head Diameter | Head Height | Phillips Drive |
|---------------------|----|------|--------|------------------|------------------|-------------|---------------|-------------|----------------|
| | # | (mm) | (inch) | (TPI) | (mm) | D(mm) | A(mm) | H(mm) | (#) |
| KSTP1412 | 14 | 6.3 | 1/2" | 14 | Full | 6.02 - 6.25 | 12.01 - 12.49 | 4.11 - 4.44 | 3 |
| KSTP1416 | 14 | 6.3 | 5/8" | 14 | Full | 6.02 - 6.25 | 12.01 - 12.49 | 4.11 - 4.44 | 3 |
| KSTP1420 | 14 | 6.3 | 3/4" | 14 | Full | 6.02 - 6.25 | 12.01 - 12.49 | 4.11 - 4.44 | 3 |
| KSTP1425 | 14 | 6.3 | 1" | 14 | Full | 6.02 - 6.25 | 12.01 - 12.49 | 4.11 - 4.44 | 3 |
| KSTP1430 | 14 | 6.3 | 1-1/4" | 14 | Full | 6.02 - 6.25 | 12.01 - 12.49 | 4.11 - 4.44 | 3 |
| KSTP1440 | 14 | 6.3 | 1-1/2" | 14 | Full | 6.02 - 6.25 | 12.01 - 12.49 | 4.11 - 4.44 | 3 |
| KSTP1445 | 14 | 6.3 | 1-3/4" | 14 | Full | 6.02 - 6.25 | 12.01 - 12.49 | 4.11 - 4.44 | 3 |
| KSTP1450 | 14 | 6.3 | 2" | 14 | Full | 6.02 - 6.25 | 12.01 - 12.49 | 4.11 - 4.44 | 3 |
| KSTP1460 | 14 | 6.3 | 2-1/2" | 14 | Full | 6.02 - 6.25 | 12.01 - 12.49 | 4.11 - 4.44 | 3 |
| KSTP1475 | 14 | 6.3 | 3" | 14 | Full | 6.02 - 6.25 | 12.01 - 12.49 | 4.11 - 4.44 | 3 |
| KSTP1490 | 14 | 6.3 | 3-1/2" | 14 | Full | 6.02 - 6.25 | 12.01 - 12.49 | 4.11 - 4.44 | 3 |
| KSTP14100 | 14 | 6.3 | 4" | 14 | Full | 6.02 - 6.25 | 12.01 - 12.49 | 4.11 - 4.44 | 3 |

