




Self Drilling Screws

AS3566 Class4

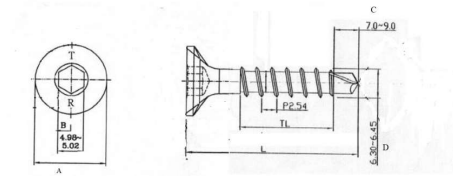

Features	Applications	Installation Speed	Drill Capacity
Self-Drilling screws are designed to have a drill-shaped point for use with metal, without having to drill a pilot hole beforehand.	<ul style="list-style-type: none"> • Decking • Using in flat surface requires • Landscape 	2300-2500 RPM max drill speed	2.0-4.0mm of steel

Finish	Material	Head
Ruspert [®] Plated Complies with AS3566 Class 4	Carbon Steel (C1022)	Bugle Batten Hex. Recess

Product Code SKU	Gauge		Length L (mm)	Threads Per inch (TPI)	Thread Length TL(mm)	Diameter (Max) D (mm)	Head Diameter (Max) A (mm)	Drive Hex. mm	Drilling Point Length C (mm)
	#	(mm)							
Coarse Thread									
SDBC14-1050	14	6.3	50	10	Full	6.3-6.45	14.5	5	7.0-9.0
SDBC14-1075	14	6.3	75	10	50	6.3-6.45	14.5	5	7.0-9.0
SDBC14-10100	14	6.3	100	10	67	6.3-6.45	14.5	5	7.0-9.0
SDBC14-10150	14	6.3	150	10	100	6.3-6.45	14.5	5	7.0-9.0

1300 532 803
sales@tower-tr.com.au
www.tower-tr.com.au

Disclaimer: every effort has been made to ensure the information provided in this document is accurate and up to date. However, Tower Fastening System does not guarantee or warrant the accuracy, completeness, or currency of the information provided.

