


Self Drilling Screws

Self-Drilling screws are designed to have a drill-shaped point for use with metal, without having to drill a pilot hole beforehand.

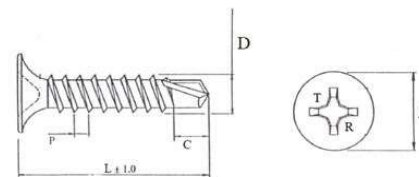

Finish	Material	Head
Zinc Yellow Plated	Carbon Steel (C1022)	Bugle Phillips Recess

Applications	Installation Speed	Drill Capacity
* Stitch timber to metal * Using in flat surface Requires * Fixing Plasterboard to Metal	2300-2500 RPM max drill speed	6G - 1-2.0mm of steel 8G - 1-3.0mm of steel

Product Code SKU	Gauge		Length	Threads Per inch (TPI)	Thread Length	Diameter (Max)	Head Diameter (Max)	Drive Phillips	Drilling Point Length
	#	(mm)	L (mm)		TL(mm)				
SDBY06-2025	6	3.5	25	20	Full	3.42-3.53	8.0-8.5	2	3.0-4.5
SDBY06-2032	6	3.5	32	20	Full	3.42-3.53	8.0-8.5	2	3.0-4.5
SDBY06-2041	6	3.5	41	20	Full	3.42-3.53	8.0-8.5	2	3.0-4.5
SDBY06-2045	6	3.5	45	20	Full	3.42-3.53	8.0-8.5	2	3.0-4.5
SDBY08-1850	8	4.2	50	18	Full	4.09-4.21	8.0-8.5	2	4.7-5.7
SDBY08-1865	8	4.2	65	18	Full	4.09-4.21	8.0-8.5	2	4.7-5.7
SDBY08-1875	8	4.2	75	18	Full	4.09-4.21	8.0-8.5	2	4.7-5.7

1300 532 803
sales@tower-tr.com.au
www.tower-tr.com.au

Disclaimer: every effort has been made to ensure the information provided in this document is accurate and up to date. However, Tower Fastening System does not guarantee or warrant the accuracy, completeness, or currency of the information provided.

