




Self Drilling Screws – Under Cut

Self-Drilling screws are designed to have a drill-shaped point for use with metal, without having to drill a pilot hole beforehand.

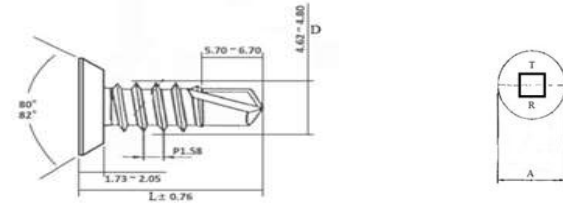

Features	Applications	Installation Speed	Drill Capacity
* Engineered for fast drilling and smooth tapping with less effort * Countersunk head available for working purpose	<ul style="list-style-type: none"> Hinge Window or Door Using in flat surface required 	2300-2500 RPM max drill speed	1.0-3.0mm of steel

Finish	Material	Head
Zinc Plated	Carbon Steel (C1022)	Countersunk Under Cut Square Recess

Product Code SKU	Gauge		Length	Threads Per inch (TPI)	Thread Length	Diameter	Head Diameter	Drive Square #	Drilling Point Length
	#	(mm)	L (mm)		(mm)		A (mm)		C (mm)
SDCSQZ10-1616UC	10	4.8	16	16	Full	4.62-4.8	8.64-9.77	2	5.7-6.7
SDCSQZ10-1620UC	10	4.8	20	16	Full	4.62-4.8	8.64-9.77	2	5.7-6.7

10G Screw with 8G Head

1300 532 803
 sales@tower-tr.com.au
 www.tower-tr.com.au

Disclaimer: every effort has been made to ensure the information provided in this document is accurate and up to date. However, Tower Fastening System does not guarantee or warrant the accuracy, completeness, or currency of the information provided.
 ©TOWER Fastening System. All rights reserved. Version: 2309

