




Self Drilling Screws \$500 (Extended No.5 Point) Screws

Self-Drilling screws are designed to have a drill-shaped point for use with metal, without having to drill a pilot hole beforehand.







15.0-16.0

Features	Applications	Installation Speed	Drill Capacity
Engineered for fast drilling and smooth tapping with less effort.	 For heavy duty purpose Metal deck to structural steel or bar joist Clip to structural or bar joist longer length fasteners for sheet applications 	2300-3000 RPM max drill speed	6-12mm steel

Finish	Material	Head
Ruspert [®] Plated complies with AS3566 Class 4	Carbon Steel (C1022)	Hex Flange Washer

5/16"

Product Code SKU	Ga	uge	Length	Threads per inch	Thread Length	Diameter (Max)	Head Diameter (Max)	Head Height	Hex. Socket	Cutting Length
	# (mm)	(mm)	(TPI)	(mm)	(mm)	(mm)	(mm)	(inch)	(mm)	
SDHCE12-2432	12	5.5	32	24	Full	5.28-5.46	13.97-14.70	5.08-5.90	5/16"	15.0-16.0
SDHCE12-2438	12	5.5	38	24	Full	5.28-5.46	13.97-14.70	5.08-5.90	5/16"	15.0-16.0
SDHCE12-2450	12	5.5	50	24	Full	5.28-5.46	13.97-14.70	5.08-5.90	5/16"	15.0-16.0
SDHCE12-2465	12	5.5	65	24	Full	5.28-5.46	13.97-14.70	5.08-5.90	5/16"	15.0-16.0
SDHCE12-2485	12	5.5	85	24	Full	5.28-5.46	13.97-14.70	5.08-5.90	5/16"	15.0-16.0
SDHCE12-24100	12	5.5	100	24	Full	5.28-5.46	13.97-14.70	5.08-5.90	5/16"	15.0-16.0
SDHCE12-24115	12	5.5	115	24	100	5.28-5.46	13.97-14.70	5.08-5.90	5/16"	15.0-16.0
With NEO						V				
SDHCEN12-2432	12	5.5	32	24	Full	5.28-5.46	13.97-14.70	5.08-5.90	5/16"	15.0-16.0
SDHCEN12-2438	12	5.5	38	24	Full	5.28-5.46	13.97-14.70	5.08-5.90	5/16"	15.0-16.0
SDHCEN12-2450	12	5.5	50	24	Full	5.28-5.46	13.97-14.70	5.08-5.90	5/16"	15.0-16.0
SDHCEN12-2465	12	5.5	65	24	Full	5.28-5.46	13.97-14.70	5.08-5.90	5/16"	15.0-16.0

5.28-5.46

Full

1300 532 803 sales@tower-tr.com.au www.tower-tr.com.au


SDHCEN12-2485

Disclaimer: every effort has been made to ensure the information provided in this document biscalariler. every effort has been index or ensure the information provided in this documents and up to date. However, Tower Fastening System does not guarantee or warrant the accuracy, completeness, or currency of the information provided.

©TOWER Fastening System. All rights reserved. Version: 2309

12

5.5

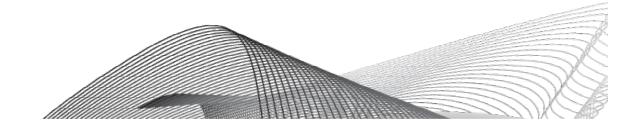

5.08-5.90

13.97-14.70