





Self Drilling Screws - AS3566 Class4

Self-Drilling screws are designed to have a drill-shaped point for use with metal, without having to drill a pilot hole beforehand.

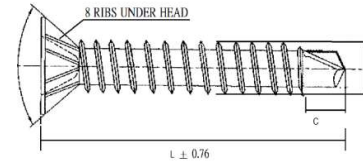

Features	Applications	Installation Speed	Drill Capacity
Csk. Rib head designed for flush in wood	<ul style="list-style-type: none"> Decking Fastening wood to steel frames Villaboard 	2300-2500 RPM max drill speed	1.0-3.0mm of steel

Finish	Material	Head
Ruspert [®] Plated complies with AS3566 Class 4	Carbon Steel (C1022)	Csk. Rib Phillips Recess

Product Code SKU	Gauge		Length L (mm)	Threads Per inch (TPI)	Thread Length (mm)	Diameter (Max) D (mm)	Head Diameter (Max) A (mm)	Drive Phillips #	Drilling Point Length C (mm)
	#	(mm)							
SDSC08-1820	8	4.2	20	18	Full	4.09-4.21	7.42-8.43	2	4.7-5.7
SDSC08-1825	8	4.2	25	18	Full	4.09-4.21	7.42-8.43	2	4.7-5.7
SDSC08-1830	8	4.2	30	18	Full	4.09-4.21	7.42-8.43	2	4.7-5.7

1300 532 803
sales@tower-tr.com.au
www.tower-tr.com.au

Disclaimer: every effort has been made to ensure the information provided in this document is accurate and up to date. However, Tower Fastening System does not guarantee or warrant the accuracy, completeness, or currency of the information provided.
 ©TOWER Fastening System. All rights reserved. Version: 2309

