


Stitch Screws - Needle Point

Stitch Screws are used for fixing fixtures into metals or wooden objects, while also retaining the ability to attach metals together.

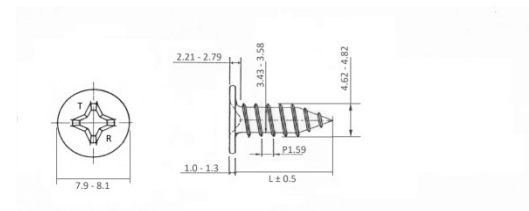

Features	Applications	Installation Speed	Drill Capacity
Flat top has a low profile head Needle Point	<ul style="list-style-type: none"> Timber Plasterboard Thin Sheet Steel 	2500 RPM max drill speed	<1.0mm thin steel

Finish	Material	Head
Ruspert [®] Plated Yellow Zinc Plated	Carbon Steel	Flat top Phillips Recess

Product Code SKU	Gauge		Length	Threads per inch (TPI)	Thread Length	Diameter (Max)	Head Diameter (Max)	Head Height (Max)	Drive Phillips
	#	(mm)	(mm)		(mm)	D(mm)	A(mm)	H(mm)	#
AS3566 Class3									
STFTG1016	10	4.8	16	16	Full	4.62 – 4.82	7.90 – 8.10	1.00 – 1.30	2
Yellow Zinc									
STFTY1016	10	4.8	16	16	Full	4.62 – 4.82	7.90 – 8.10	1.00 – 1.30	2

Class 3 Screws

- Suitable for external use in mild urban, moderate industrial or moderate marine environments.
- Moderate industrial environments refer to atmosphere with medium pollution from industry.
- Moderate marine environments refer to coastal areas with low airborne salinity.
- Corrosivity as classified in accordance with AS 3566.2-2002,5.3 and ISO 9223.

1300 532 803
sales@tower-tr.com.au
www.tower-tr.com.au

Disclaimer: every effort has been made to ensure the information provided in this document is accurate and up to date. However, Tower Fastening System does not guarantee or warrant the accuracy, completeness, or currency of the information provided.

