



Type 17 Screws

AS3566 Class 4

Suitable for external use in heavy industrial or severe marine environments. Heavy industrial environments refer to atmosphere with medium pollution from industry. Severe marine environments refer to coastal areas with high airborne salinity. Severe marine environments refer to coastal areas with high airborne salinity. Corrosively as classified in accordance with AS 3566-2002, 5.4 and ISO 9223.

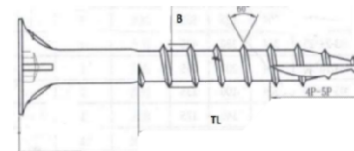

Features	Applications	Installation Speed	Drill Capacity
Type 17 screws are a thread cutting screw for wood. Designed with a coarse tapping screw thread and a sharp point for capturing wood chips.	<ul style="list-style-type: none"> • Fix timber to timber • Decking • Gates and fencing • Landscaping 	1500 RPM max drill speed	<1.0mm thin steel

Finish	Material	Head
Ruspert [®] Plated	Carbon Steel	Bugle-Batten Internal Hex. Drive

Product Code SKU	Gauge		Length L (mm)	Threads per inch (TPI)	Thread Length TL (mm)	Diameter B (mm)	Head Diameter A (mm)	Internal Hex. Drive (mm)
	#	(mm)						
T17BC1450	14	6.3	50	10	35	6.3 - 6.45	14.0 - 14.5	5
T17BC1465	14	6.3	65	10	50	6.3 - 6.45	14.0 - 14.5	5
T17BC1475	14	6.3	75	10	50	6.3 - 6.45	14.0 - 14.5	5
T17BC1490	14	6.3	90	10	75	6.3 - 6.45	14.0 - 14.5	5
T17BC14100	14	6.3	100	10	75	6.3 - 6.45	14.0 - 14.5	5
T17BC14125	14	6.3	125	10	100	6.3 - 6.45	14.0 - 14.5	5
T17BC14150	14	6.3	150	10	100	6.3 - 6.45	14.0 - 14.5	5
T17BC14200	14	6.3	200	10	100	6.3 - 6.45	14.0 - 14.5	5
T17BC16225	16	6.8	225	7	100	6.6 - 7.2	13.0 - 15.0	5
T17BC16250	16	6.8	250	7	100	6.6 - 7.2	13.0 - 15.0	5

1300 532 803
sales@tower-tr.com.au
www.tower-tr.com.au

Disclaimer: every effort has been made to ensure the information provided in this document is accurate and up to date. However, Tower Fastening System does not guarantee or warrant the accuracy, completeness, or currency of the information provided.

