


Type 17 Screws

AS3566 Class 4

Type 17 screws are a thread cutting screw for wood. Designed with a coarse tapping screw thread and a sharp point for capturing wood chips.

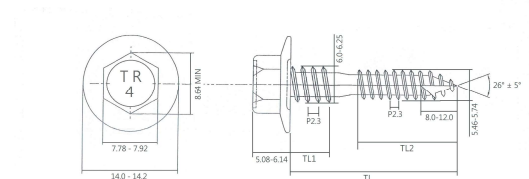

Features	Applications	Installation Speed	Drill Capacity
Double Grip Coarse Thread Flute Cuts	<ul style="list-style-type: none"> Roofing & Cladding to timber 	1500 RPM max drill speed	<1.0mm thin steel

Finish	Material	Head
Ruspert [®] Plated	Carbon Steel	Hex Flange Washer With EPDM NEO washer

Product Code SKU	Gauge		Length (mm)	Threads per inch (TPI)	Diameter (Max) D (mm)	Head Diameter (Max) A (mm)	Head Height H (mm)	Hex. Socket (inch)	Cutting Length S (mm)
	#	(mm)							
T17HCDN1250	12	5.5	50	11	5.46 – 5.74	14.0 – 14.2	5.08 - 6.14	5/16"	8.0 – 12.0
T17HCDN1265	12	5.5	65	11	5.46 – 5.74	14.0 – 14.2	5.08 - 6.14	5/16"	8.0 – 12.0

AS3566 Class 4

- Suitable for external use in heavy industrial or severe marine environments.
- Heavy industrial environments refer to atmosphere with medium pollution from industry.
- Severe marine environments refer to coastal areas with high airborne salinity.
- Corrosivity as classified in accordance with AS 3566-2002, 5.4 and ISO 9223.

1300 532 803
sales@tower-tr.com.au
www.tower-tr.com.au

Disclaimer: every effort has been made to ensure the information provided in this document is accurate and up to date. However, Tower Fastening System does not guarantee or warrant the accuracy, completeness, or currency of the information provided.

