

### Villaboard Screws – Needle Point


AS3566 Class3

Suitable for external use in mild urban, moderate industrial or moderate marine environments.

Moderate industrial environments refer to atmosphere with medium pollution from industry.

Moderate marine environments refer to coastal areas with low airborne salinity.

Corrosively as classified in accordance with AS 3566.2-2002,5.3 and ISO 9223.

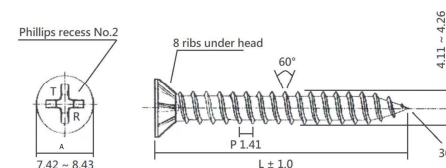

Features	Applications	Installation Speed	Drill Capacity
Villaboard screws are designed primarily for use with cement or villaboard sheeting.	<ul style="list-style-type: none"> <li>For fixing to timber</li> <li>For fixing to Light Steel</li> </ul>	2200 RPM drill speed	<1.0mm thin steel

Finish	Material	Head
Ruspert <sup>®</sup> Plated	Carbon Steel	Countersunk Rib. Phillips

Product Code SKU	Gauge		Length L (mm)	Threads per inch (TPI)	Thread Length (mm)	Diameter B (mm) (mm)	Head Diameter A(mm) (mm)	Pitch P(mm) (mm)	Phillips Drive #
	#	(mm)							
VBSG0820	8	4.2	20	18	Full	4.11 – 4.26	7.42-8.43	1.41	2
VBSG0830	8	4.2	30	18	Full	4.11 – 4.26	7.42-8.43	1.41	2

1300 532 803  
[sales@tower-tr.com.au](mailto:sales@tower-tr.com.au)  
[www.tower-tr.com.au](http://www.tower-tr.com.au)

Disclaimer: every effort has been made to ensure the information provided in this document is accurate and up to date. However, Tower Fastening System does not guarantee or warrant the accuracy, completeness, or currency of the information provided.

