


## Sealed Blind Rivet – Water proof

**Blind Rivets** are now capable in every industrial field to replace Welding, Tapping Screws or Bolts & Nuts and to fasten materials speedy and securely from one side of the work by using an exclusive fastening tool.

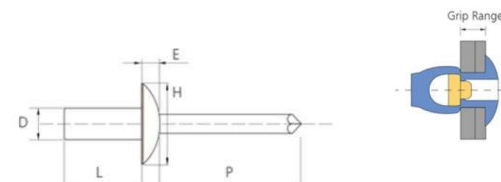

Advantage:	Applications
<ul style="list-style-type: none"> <li>* Unique cup shaped end configuration seals tight, preventing passage of vapour or liquid through set rivet.</li> <li>* Provides greater tensile and shear strength than equivalent open end</li> <li>* Mandrel retention.</li> </ul>	<ul style="list-style-type: none"> <li>• Coach work</li> <li>• Containers</li> <li>• Air Conditioning</li> <li>• Ship building industry &amp; cladding</li> </ul>

	Material	Finish	Head
<b>Body:</b>	Aluminum	Natural Polish	Dome (Truss)
<b>Mandrel:</b>	Aluminum	Natural Polish	

Product Code SKU	Size		Body Length	Head Height	Head Dia. (Max)	Mandrel (Ref)	Hole Size	Grip Range		Tensile	Shear
	D (mm)	Inch						(mm)	(mm)		
WAAD4-2	3.2	1/8"	8	1.3	6.7	27	3.3-3.4	1.0-3.5		540	460
WAAD4-4	3.2	1/8"	11	1.3	6.7	27	3.3-3.4	3.5-6.5		540	460
WAAD5-4	4.0	5/32"	11	1.7	8.4	27	4.1-4.2	5.0-6.5		760	720
WAAD5-6	4.0	5/32"	15	1.7	8.4	27	4.1-4.2	6.5-10.0		760	720
WAAD6-4	4.8	3/16"	13	2.0	10.1	27	4.9-5.0	6.5-8.0		1400	1000
WAAD6-6	4.8	3/16"	16	2.0	10.1	27	4.9-5.0	8.0-11.0		1400	1000
WAAD6-8	4.8	3/16"	18	2.0	10.1	27	4.9-5.0	11.0-13.0		1400	1000

1300 532 803  
[sales@tower-tr.com.au](mailto:sales@tower-tr.com.au)  
[www.tower-tr.com.au](http://www.tower-tr.com.au)

Disclaimer: every effort has been made to ensure the information provided in this document is accurate and up to date. However, Tower Fastening System does not guarantee or warrant the accuracy, completeness, or currency of the information provided.

