


Sealed Blind Rivet – Water proof

Blind Rivets are now capable in every industrial field to replace Welding, Tapping Screws or Bolts & Nuts and to fasten materials speedy and securely from one side of the work by using an exclusive fastening tool.

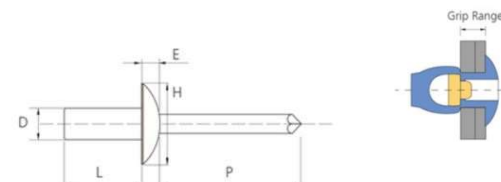

Advantage:

- * Unique cup shaped end configuration seals tight, preventing passage of vapour or liquid through set rivet.
- * Provides greater tensile and shear strength than equivalent open end
- * Mandrel retention.

Applications


- Coach work
- Containers
- Air Conditioning
- Ship building industry & cladding

	Material	Finish	Head
Body:	Aluminum (5056)	Natural Polish	Dome (Truss)
Mandrel:	Steel	Black	

Product Code SKU	Size		Body Length	Head Height	Head Dia. (Max)	Mandrel (Ref)	Hole Size	Grip Range		Tensile	Shear
	D (mm)	Inch						(mm)	(mm)		
WASD4-1	3.2	1/8"	6	1.3	6.7	27	3.3-3.4	0.5-1.5		1450	1100
WASD4-2	3.2	1/8"	8	1.3	6.7	27	3.3-3.4	1.5-3.0		1450	1100
WASD4-3	3.2	1/8"	10	1.3	6.7	27	3.3-3.4	3.0-5.0		1450	1100
WASD4-4	3.2	1/8"	12	1.3	6.7	27	3.3-3.4	5.0-6.5		1450	1100
WASD4-6	3.2	1/8"	14	1.3	6.7	27	3.3-3.4	6.5-8.0		1450	1100
WASD4-8	3.2	1/8"	16	1.3	6.7	27	3.3-3.4	8.0-12.5		1450	1100
WASD5-1	4.0	5/32"	6	1.7	8.4	27	4.1-4.2	0.5-1.5		2200	1600
WASD5-2	4.0	5/32"	8	1.7	8.4	27	4.1-4.2	1.5-3.0		2200	1600
WASD5-3	4.0	5/32"	10	1.7	8.4	27	4.1-4.2	3.0-5.0		2200	1600
WASD5-4	4.0	5/32"	12	1.7	8.4	27	4.1-4.2	5.0-6.5		2200	1600
WASD5-5	4.0	5/32"	14	1.7	8.4	27	4.1-4.2	6.5-8.0		2200	1600
WASD5-6	4.0	5/32"	16	1.7	8.4	27	4.1-4.2	8.0-10.0		2200	1600


1300 532 803
sales@tower-tr.com.au
www.tower-tr.com.au

Disclaimer: every effort has been made to ensure the information provided in this document is accurate and up to date. However, Tower Fastening System does not guarantee or warrant the accuracy, completeness, or currency of the information provided.

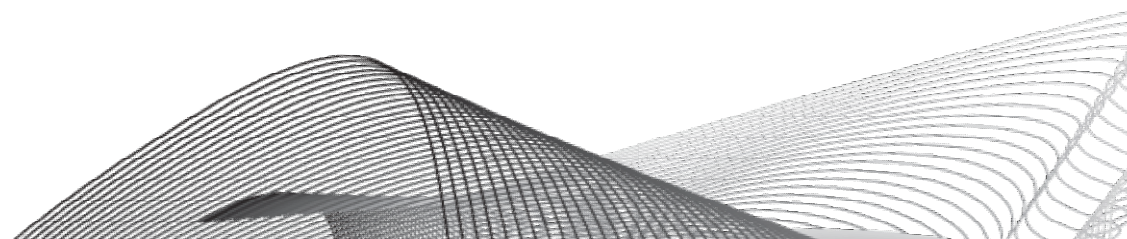

Sealed Blind Rivet – Water proof

Blind Rivets are now capable in every industrial field to replace Welding, Tapping Screws or Bolts & Nuts and to fasten materials speedy and securely from one side of the work by using an exclusive fastening tool.

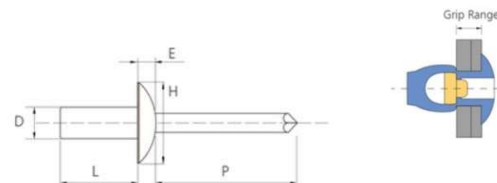

Advantage:	Applications
* Unique cup shaped end configuration seals tight, preventing passage of vapour or liquid through set rivet. * Provides greater tensile and shear strength than equivalent open end * Mandrel retention.	• Coach work • Containers • Air Conditioning • Ship building industry & cladding

	Material	Finish	Head
Body:	Aluminum (5056)	Natural Polish	Dome (Truss)
Mandrel:	Steel	Black	

Product Code SKU	Size		Body Length	Head Height	Head Dia. (Max)	Mandrel (Ref)	Hole Size	Grip Range	Tensile	Shear
	D (mm)	Inch								
WASD6-2	4.8	3/16"	10	2.0	10.1	27	4.9-5.0	3.0-5.0	3100	2200
WASD6-3	4.8	3/16"	12	2.0	10.1	27	4.9-5.0	5.0-6.5	3100	2200
WASD6-4	4.8	3/16"	14	2.0	10.1	27	4.9-5.0	5.0-7.5	3100	2200
WASD6-6	4.8	3/16"	16	2.0	10.1	27	4.9-5.0	6.5-9.0	3100	2200
WASD6-8	4.8	3/16"	18	2.0	10.1	27	4.9-5.0	8.0-10.5	3100	2200
WASD6-10	4.8	3/16"	22	2.0	10.1	27	4.9-5.0	9.0-12.0	3100	2200
WASD6-12	4.8	3/16"	25	2.0	10.1	27	4.9-5.0	12.0-18.0	3100	2200
WASD8-4	6.4	1/4"	12	2.7	13.4	27	6.5-6.5	1.5-6.5	4900	4000
WASD8-6	6.4	1/4"	16	2.7	13.4	27	6.5-6.5	6.5-8.0	4900	4000
WASD8-8	6.4	1/4"	20	2.7	13.4	27	6.5-6.5	8.0-12.0	4900	4000
WASD8-10	6.4	1/4"	25	2.7	13.4	27	6.5-6.5	12.0-18.0	4900	4000

1300 532 803
sales@tower-tr.com.au
www.tower-tr.com.au

Disclaimer: every effort has been made to ensure the information provided in this document is accurate and up to date. However, Tower Fastening System does not guarantee or warrant the accuracy, completeness, or currency of the information provided.

