





Bulb-tite (Tri-Firm) Blind Rivets with NEO (Waterproof)

A bulb tite blind rivet provides a 'Y' shaped split tail formation, providing a large blind side bearing area. This will also provide a relatively high resistance to pull out loads.

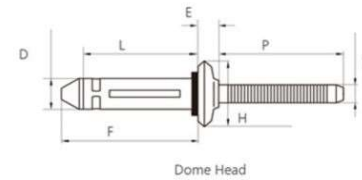

Advantage:	Applications
<ul style="list-style-type: none"> * Resists pull-out and cracking the work piece * Extra large secondary head provides more bearing surface * With the wide spreading tail, this rivet has a greater tolerance of oversized holes and offer a wide grip range * Waterproof with EPDM Neo 	<ul style="list-style-type: none"> • Soft Material such as wood • Insulation • Plastic • Plaster boards

	Material	Finish	Head
Body:	Aluminum 5056	Natural Polish	Large Flange
Mandrel:	Aluminum Alloy	Natural Polish	
Washer:	EPDM NEO		

Product Code SKU	Size		Body Length L (±1)mm	Head Height E (mm)	Head Dia. (Max) H (mm)	Mandrel (Ref) P (mm)	Hole Size (mm)	Grip Range (mm)	Tensile N	Shear N
	D (mm)	Inch								
AADBTN9-6	7.7	19/64"	28	5.33	19.4	25.4	7.8-8.2	1.1-9.5	4400	5600
AADBTN9-10	7.7	19/64"	34	5.33	19.4	25.4	7.8-8.2	6.4-15.9	4400	5600

1300 532 803
sales@tower-tr.com.au
www.tower-tr.com.au

Disclaimer: every effort has been made to ensure the information provided in this document is accurate and up to date. However, Tower Fastening System does not guarantee or warrant the accuracy, completeness, or currency of the information provided.

