



Bulb-tite (Tri-Firm) Blind Rivets with NEO (Waterproof)

A bulb tite blind rivet provides a 'Y' shaped split tail formation, providing a large blind side bearing area. This will also provide a relatively high resistance to pull out loads.

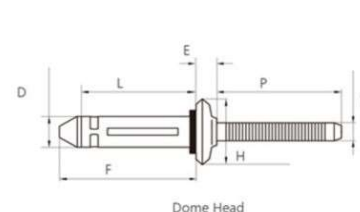

Advantage:	Applications
<ul style="list-style-type: none"> * Resists pull-out and cracking the work piece * Extra large secondary head provides more bearing surface * With the wide spreading tail, this rivet has a greater tolerance of oversized holes and offer a wide grip range * Waterproof with EPDM Neo 	<ul style="list-style-type: none"> • Soft Material such as wood • Insulation • Plastic • Plaster boards

	Material	Finish	Head
Body: Mandrel: Washer:	Aluminum 5056 Aluminum Alloy EPDM NEO	Natural Polish Natural Polish	Large Flange

Product Code SKU	Size		Body Length	Head Height	Head Dia. (Max)	Mandrel (Ref)	Hole Size	Grip Range	Tensile	Shear
	D (mm)	Inch	L (±1)mm							
AALBTN9-6	7.7	19/64"	28	5.33	19.4	25.4	7.8-8.2	1.1-9.5	4400	5600
AALBTN9-10	7.7	19/64"	34	5.33	19.4	25.4	7.8-8.2	6.4-15.9	4400	5600

1300 532 803
 sales@tower-tr.com.au
 www.tower-tr.com.au

Disclaimer: every effort has been made to ensure the information provided in this document is accurate and up to date. However, Tower Fastening System does not guarantee or warrant the accuracy, completeness, or currency of the information provided.

