



Anlock Rivet (Mega Lock)

Anlock Blind Rivets In-Bolt with a multi-grip clamping range and a high tensile and shear strength provides a high resistance to vibrations and a good watertight performance.

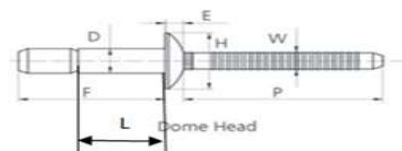

Advantage:	Applications
<ul style="list-style-type: none"> * High shear and tensile strength * Superior holding power (Clamp up) * Fastens over wide grip range * Locking feature prevents loosening of mandrel from vibration 	<ul style="list-style-type: none"> • Automotive industry • Truck building • Containers • Construction work • Coach work

	Material	Finish	Head
Body: Mandrel:	Carbon Steel Carbon Steel	Zinc Plated Zinc Plated	Dome

Product Code SKU	Size		Body Length	Head Height	Head Dia. (Max)	Mandrel (Ref)	Hole Size	Grip Range	Tensile	Shear
	D (mm)	Inch								
ANSSD6-4	4.8	3/16"	10	2.5	10.2	27	4.9-5.1	1.6-6.9	4400	5600
ANSSD6-6	4.8	3/16"	14	2.5	10.2	27	4.9-5.1	1.6-11.0	4400	5600
ANSSD8-6	6.4	1/4"	14	3.1	13.5	27	6.7-6.9	2.1-9.5	8200	10500
ANSSD8-10	6.4	1/4"	20	3.1	13.5	27	6.7-6.9	2.1-15.8	8200	10500
ANSSD12-12	9.8	3/8"	21	4.5	20.5	27	10.0-10.4	6.1-19.0	17700	26600
ANSSD12-18	9.8	3/8"	35	4.5	20.5	27	10.0-10.4	15.9-28.5	17700	26600

1300 532 803
sales@tower-tr.com.au
www.tower-tr.com.au

Disclaimer: every effort has been made to ensure the information provided in this document is accurate and up to date. However, Tower Fastening System does not guarantee or warrant the accuracy, completeness, or currency of the information provided.

