


## Drywall Screws Yellow Zinc

Drywall screws are traditionally used to attach drywall to metal and wood, but also have many other external applications.




Features	Applications	Installation Speed	Drill Capacity
Bugle head Coarse thread Needle point	For fixing to <ul> <li>light steel</li> <li>timber</li> <li>plasterboard</li> </ul>	2300 -2500 RPM max drill speed	<1.0mm thin steel



Finish	Material	Head
Yellow Zinc Plated	Carbon Steel	Bugle Phillip Drive

Product Code SKU	Ga	uge	Length	Threads per inch (TPI)	Thread Length	Diameter	Head Diameter	Pitch	Phillips Drive
	#	(mm)	L (mm)		TL (mm)	B (mm)	A (mm)	P (mm)	#
DWBY06-0920	6	3.5	20	9	Full	3.4-3.6	8.0-8.5	2.82	2
DWBY06-0925	6	3.5	25	9	Full	3.4-3.6	8.0-8.5	2.82	2
DWBY06-0928	6	3.5	28	9	Full	3.4-3.6	8.0-8.5	2.82	2
DWBY06-0932	6	3.5	32	9	Full	3.4-3.6	8.0-8.5	2.82	2
DWBY06-0940	6	3.5	40	9	Full	3.4-3.6	8.0-8.5	2.82	2
DWBY06-0945	6	3.5	45	9	Full	3.4-3.6	8.0-8.5	2.82	2
DWBY06-0950	6	3.5	50	9	Full	3.4-3.6	8.0-8.5	2.82	2
DWBY07-1020	7	3.8	20	10	Full	3.78-3.96	8.0-8.5	2.54	2
DWBY07-1025	7	3.8	25	10	50	3.78-3.96	8.0-8.5	2.54	2
DWBY07-1032	7	3.8	32	10	Full	3.78-3.96	8.0-8.5	2.54	2
DWBY07-1050	7	3.8	50	10	Full	3.78-3.96	8.0-8.5	2.54	2
DWBY07-1057	7	3.8	57	10	50	3.78-3.96	8.0-8.5	2.54	2

1300 532 803 sales@tower-tr.com.au www.tower-tr.com.au

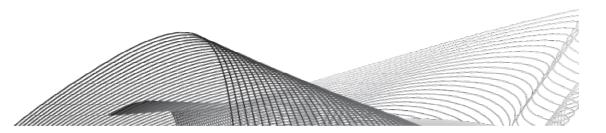

Disclaimer: every effort has been made to ensure the information provided in this document is accurate and up to date. However, Tower Fastening System does not guarantee or warrant the accuracy, completeness, or currency of the information provided.






Feature

.

.

Chipboard Screws Chipboard screws have coarse threads and fine shanks, designed for use in chipboards and soft woods.

The Zinc yellow or Zinc Plated coating are suitable for most indoor applications.



Head


Countersunk Rib.

Phillips Drive

res Applications		Installation Speed	Drill Capacity					
Coarse threads and	Chipboard	2300 -2500 RPM max drill speed	<1.0mm thin steel	Fini	sh	Material	ł	
fine shanks, Csk.rib head available for working purpose	Soft timbers	unii speeu		Zinc	Yellow Plated	Carbon Steel	(	
for working purpose								

Product Code	Gau	ige	Length	Threads per inch (TPI)	Thread Length	Diameter	Head Diameter (A)	Pitch	Phillips Drive
SKU	#	(mm)	L (mm)		TL (mm)	B (mm)	A (mm)	P (mm)	#
DWBY07- 1065	10	4.8	65	10	35	4.7-5.0	8-64-9.77	2.54	2
DWBY07- 1075	10	4.8	75	10	50	4.7-5.0	8-64-9.77	2.54	2
DWBY07- 10100	10	4.8	100	10	50	4.7-5.0	8-64-9.77	2.54	2

1300 532 803 sales@tower-tr.com.au www.tower-tr.com.au

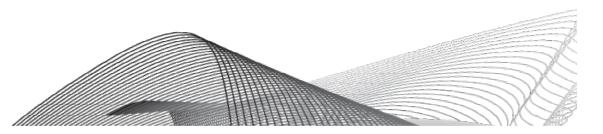

Disclaimer: every effort has been made to ensure the information provided in this document is accurate and up to date. However, Tower Fastening System does not guarantee or warrant the accuracy, completeness, or currency of the information provided.