



Open High Strength Blind Rivet (Hem-Firm)

Blind Rivets are now capable in every industrial field to replace Welding, Tapping Screws or Bolts & Nuts and to fasten materials speedy and securely from one side of the work by using an exclusive fastening tool.

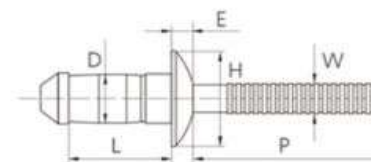

Dome Head



Advantage:

- * Locked, rattle free mandrel
- * Superior shear and tensile strength, soft and brittle materials inclusive
- * Provides excellent integrity
- * Fills irregular holes

Applications

- Automotive industry
- Truck building
- Construction Work
- Coach work

	Material	Finish	Head
Body:	Carbon Steel	Zinc Plated	Dome (Truss)
Mandrel:	Carbon Steel	Zinc Plated	

Product Code SKU	Size		Body Length	Head Height	Head Dia. (Max)	Mandrel (Ref)	Hole Size	Grip Range	Tensile	Shear
	D (mm)	Inch	L (±1)mm	E (mm)	H (mm)	P (mm)	(mm)	(mm)	N	N
HKSSD6-3	4.8	3/16"	9.0	2.5	10.2	27	4.9-5.1	1.5-3.5	3300	3100
HKSSD6-4	4.8	3/16"	11.5	2.5	10.2	27	4.9-5.1	3.5-6.0	3300	3100
HKSSD6-5	4.8	3/16"	14.0	2.5	10.2	27	4.9-5.1	6.0-8.5	3300	3100
HKSSD6-6	4.8	3/16"	16.5	2.5	10.2	27	4.9-5.1	8.5-11.0	3300	3100
HKSSD6-8	4.8	3/16"	19.0	2.5	10.2	27	4.9-5.1	11.0-13.5	3300	3100
HKSSD8-2	6.4	1/4"	9.0	3.5	13.4	27	6.6-6.8	1.5-3.5	7920	9450
HKSSD8-4	6.4	1/4"	12.5	3.5	13.4	27	6.6-6.8	3.5-6.5	7920	10800
HKSSD8-6	6.4	1/4"	16.5	3.5	13.4	27	6.6-6.8	6.5-10.5	7920	12500
HKSSD8-8	6.4	1/4"	18.5	3.5	13.4	27	6.6-6.8	9.5-12.5	7920	12500

1300 532 803
sales@tower-tr.com.au
www.tower-tr.com.au

Disclaimer: every effort has been made to ensure the information provided in this document is accurate and up to date. However, Tower Fastening System does not guarantee or warrant the accuracy, completeness, or currency of the information provided.

