



Type 17 Screws

Zinc Yellow

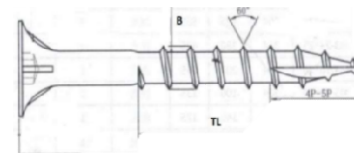

| Features | Applications | Installation Speed | Drill Capacity |
|---------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------|-------------------|
| Type 17 screws are a thread cutting screw for wood. Designed with a coarse tapping screw thread and a sharp point for capturing wood chips. | <ul style="list-style-type: none"> • Fix timber to timber • Decking • Gates and fencing • Landscaping | 1500 RPM max drill speed | <1.0mm thin steel |

| Finish | Material | Head |
|--------------------|--------------|-------------------------------------|
| Zinc Yellow Plated | Carbon Steel | Bugle-Batten Internal Hex. Drive |

| Product Code SKU | Gauge | | Length L (mm) | Threads per inch (TPI) | Thread Length TL (mm) | Diameter B (mm) | Head Diameter A (mm) | Internal Hex. Drive (mm) |
|---------------------|-------|------|------------------|---------------------------|--------------------------|--------------------|-------------------------|-----------------------------|
| | # | (mm) | | | | | | |
| T17BY1450 | 14 | 6.3 | 50 | 10 | 35 | 6.3 - 6.45 | 14.0 - 14.5 | 5 |
| T17BY1465 | 14 | 6.3 | 65 | 10 | 50 | 6.3 - 6.45 | 14.0 - 14.5 | 5 |
| T17BY1475 | 14 | 6.3 | 75 | 10 | 50 | 6.3 - 6.45 | 14.0 - 14.5 | 5 |
| T17BY14100 | 14 | 6.3 | 100 | 10 | 75 | 6.3 - 6.45 | 14.0 - 14.5 | 5 |
| T17BY14150 | 14 | 6.3 | 150 | 10 | 100 | 6.3 - 6.45 | 14.0 - 14.5 | 5 |

1300 532 803
sales@tower-tr.com.au
www.tower-tr.com.au

Disclaimer: every effort has been made to ensure the information provided in this document is accurate and up to date. However, Tower Fastening System does not guarantee or warrant the accuracy, completeness, or currency of the information provided.

